

SIEMENS

Product data sheet

3RN1013-1BW10




Abb. ähnlich / similar picture

THERMISTOR MOTOR PROTECTION
MULTIFUNCTION EVALUATION UNIT
MANUAL/AUTO/REMOTE,
SHORT-CIRC.DETECT., 2W, UC 24...240V,
SCREW CONNECTION

General technical details:

Type of voltage	AC/DC
Supply voltage frequency	
<ul style="list-style-type: none"> • 1 / for auxiliary and control current circuit <ul style="list-style-type: none"> • rated value 	50 Hz
<ul style="list-style-type: none"> • 2 / for auxiliary and control current circuit <ul style="list-style-type: none"> • rated value 	60 Hz
Control supply voltage	
<ul style="list-style-type: none"> • 1 <ul style="list-style-type: none"> • at 50 Hz / for AC <ul style="list-style-type: none"> • initial rated value • final rated value • at 60 Hz / for AC <ul style="list-style-type: none"> • initial rated value • final rated value • for DC <ul style="list-style-type: none"> • initial rated value • final rated value 	24 V 240 V 24 V 240 V 24 V 240 V
Number of measuring circuits	1

Number of NC contacts / for auxiliary contact	0
Number of NO contacts / for auxiliary contact	0
Number of change-over switches / for auxiliary contact	2
Measurable temperature	
• initial value	60 °C
• final value	180 °C
Product function	
• Reclosing interlock	Yes
• Self-reset	Yes
• Defect storage	Yes
• Reset external	Yes
Mechanical design:	
Design of the electrical connection / for auxiliary and control current circuit	screw-type terminals
Design of the electrical connection / Jumper socket	No
Type of display / LED	Yes
Width	22.5 mm
Height	102 mm
Depth	91 mm

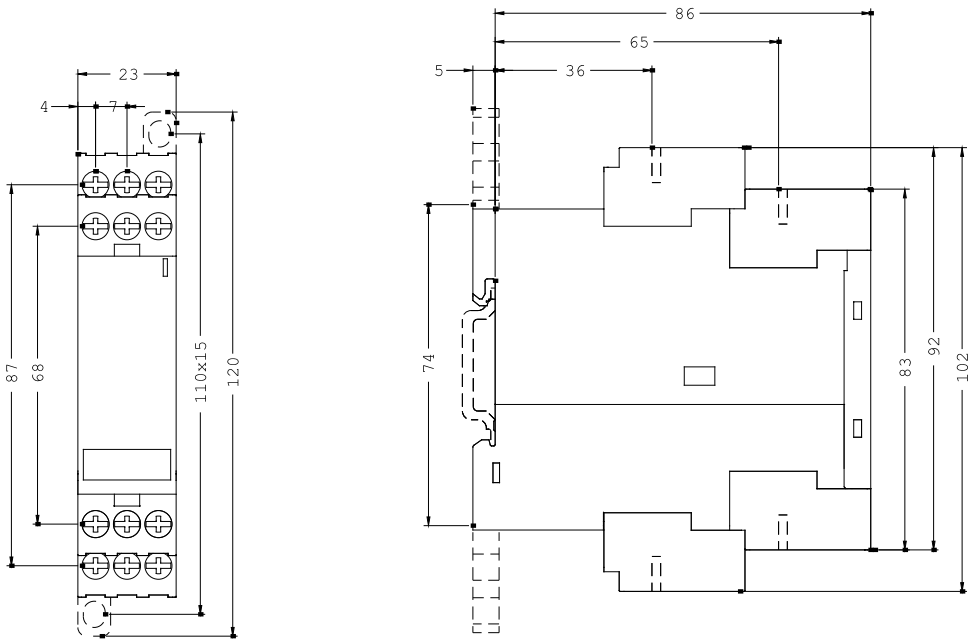

last change:

10/31/2006

Technical Assistance:

Telephone: +49 (0) 911-895-5900 (8⁰⁰ - 17⁰⁰ CET)

Fax: +49 (0) 911-895-5907

E-Mail: technical-assistance@siemens.com

Internet: www.siemens.de/lowvoltage/technical-assistance